


S/GGPB5 | Stickyprints gloss grey-back bubble-free fire-rated permanent polymeric self-adhesive vinyl 80mic

Product Code: S/GGPB5

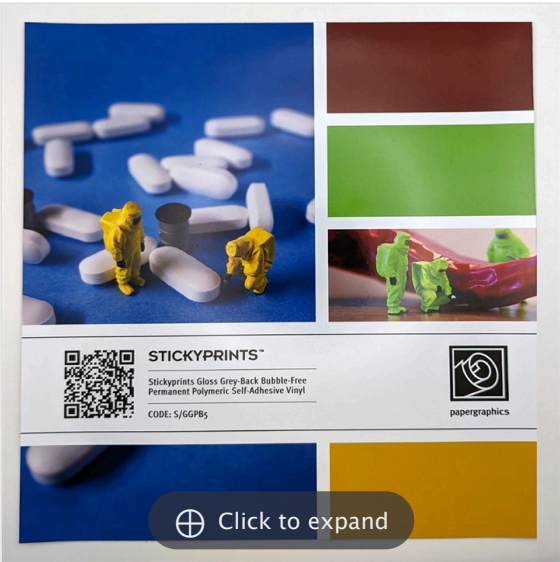

This premium quality, white gloss polymeric vinyl with a grey adhesive and bubble-free release liner, is the perfect graphics solution. Durable performance for medium to long-term use, with excellent dimensional stability making it easy to apply. The high-gloss finish produces intense, bright and vibrant graphics for both indoor and outdoor POS, advertising, promotions, exhibitions and events.

High quality, white gloss polymeric vinyl with a grey adhesive and bubble free release liner, is the perfect graphics solution.

Product Features
• Water-based acrylic permanent adhesive
• Grey back for extra opacity
• Gloss finish for vibrant prints
• Bubble free liner for simple application
• Excellent dimensional stability for easy handling
• Suitable for both indoor and outdoor use
• 7 years durability (unprinted)

- Perfectly paired with Stickybits laminate for extra protection
- B1 fire rated

Product Properties	
Brand	PG Stickyprints
Colour	N/A
Media thickness (micron)	80
Media finish	Gloss
Core diameter	76mm
Adhesive Type	Permanent Grey
Life Span	Upto 7 Years
Face film	White Gloss PVC
Liner, PE-coated, Bubble free	White 140 g/m²
Adhesive type	Pure polyacrylic , perm
Adhesive colour	Grey
Adhesive weight	20 g/m²
Adhesion on steel after 20min	8 N/25mm AFERA 5001
Adhesion on steel after 24 hr	11 N/25mm AFERA 5001
Dimensional stability MD	< -3% FTM 14
Dimensional stability CD	< 1.5% FTM 14

Ink Technology Compatibility	
Use with Aqueous Dye inks:	Not Recommended
Use with Aqueous Pigmented inks:	Not Recommended
Use with Oil Pigmented inks:	Not Recommended
Use with Laser toner:	Not Recommended
Use with Latex inks:	Recommended
Use with Solvent inks:	Recommended
Use with Eco-Solvent inks:	Recommended
Use with UV Curable inks:	Recommended
Use with Dye-Sublimation inks:	Not Recommended

Product Certifications	
•	REACH Compliant
•	RoHS compliant
•	Fire rating - DIN 4102-1 B1

Storage and Transport Advice	
•	Shelf life 2 years

Usage Guidance	
•	Application temperature min. 10°C
•	End-use temperature range from -40°C to +90°C

Diva Innovation Centre Crompton Way, Crawley West Sussex RH10 9QR

© Papergraphics 2025 | Registered Number: 01726045. VAT number: GB644666414.